Seoled **Backlight** Panel Serisi
Seoled **Backlight** Panel Series

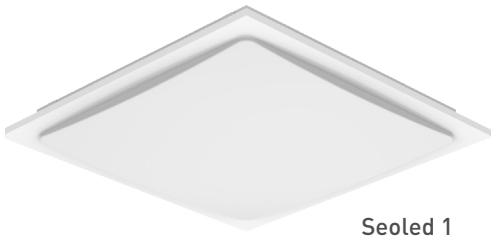

Seoled 1

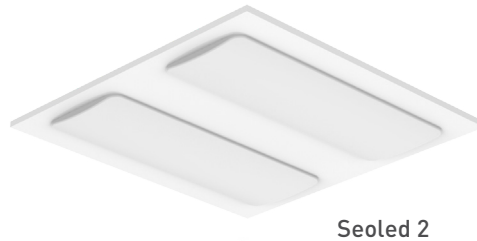

Seoled 2

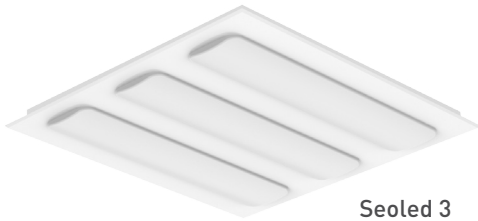

Seoled 3

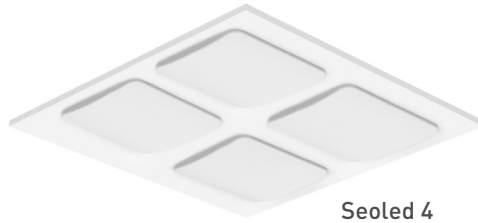

Seoled 4

Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal
LED	SMD mid power
Optik Kapak Diffuser	Yüksek ışık geçirgenliğine sahip Opal High transmission opal the
Sürücü Driver	ENEC belgeli ENEC certified

Giriş Gerilimi Input Voltage (V)	220-240
Renksel ger. ind. Colour Ren. In. (CRI)	>80
Güç Faktörü Power Fac. (cos φ)	>0.95
Opsiyonlar Options	DALI ve koridor fonksiyon uygulaması. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması.Farklı RAL kodlarında elektrostatik toz boya seçeneği.

Frekans Frequency (Hz)	50-60
IP Koruma IP Protection	IP40
RAL Kodu RAL Code	9016

DALI and corridor function applications.1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temprature (CCT). Different RAL code electrostatic power coating.

Işık Şiddeti Dağılım Eğrisi
Light Distribution Curve

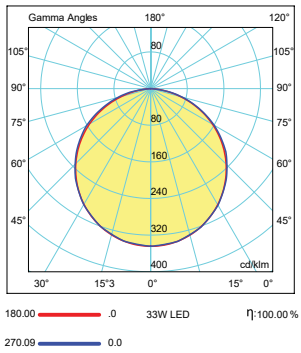

Teknik Çizim Technical Drawing

Seoled 1



Seoled 2



Seoled 3



Kullanım Alanları
Fields of Application



Bakınız sayfa 232 See page 232

Armatürlere ait büyüklükler Product Details

Ürün Kodu *Code No*	Tip *Type*	Güç *Power* (W)	Işık Akısı *Luminous Flux* (lm)	Renk Sıcaklığı *Colour Temp.* (K)	Etkinlik Faktörü *Luminous Effic.* (lm/W)	Boyutlar *Dimensions* (mm) a b c	(mm)	Koli Adedi *Pcs/Pack*	Koli Hacmi *Package Vol.* (m^3)	Koli Ağırlığı *Package Weight* (kg)
109519	Seoled 1 60x60	36	2700	6500	75	595x595x67	580x580	4	0,12	15
109520	Seoled 2 60x60	36	2700	6500	75	595x595x67	580x580	4	0,12	15
109521	Seoled 3 60x60	36	2700	6500	75	595x595x67	580x580	4	0,12	15
109234	Seoled 4 60x60	36	2700	6500	75	595x595x67	580x580	4	0,12	15

CE IP 40 220-240V 50-60Hz EN 60598-2-2